

# MAXHUB

◀ Integrated LED Wall ▶



MAXHUB All-in-one LED Displays, Born for Large Presentations

| Specification                         | LM110N07                | LM110N03                | LM138N07                 | LM138N06                 |
|---------------------------------------|-------------------------|-------------------------|--------------------------|--------------------------|
| Size (inch)                           | 110"                    | 110"                    | 138"                     | 138"                     |
| Pixel Pitch(mm)                       | 1.2                     | 1.9                     | 1.5                      | 1.9                      |
| Brightness (nit)                      | 100-550                 | 100-550                 | 100-550                  | 100-550                  |
| Refresh Rate                          | 1920-3840               | 1920-3840               | 1920-3840                | 1920-3840                |
| Resolution                            | 1920 X 1080             | 1280 X 720              | 1920 X 1080              | 1600 X 900               |
| Power Consumption(MAX/Ave)(W/display) | 2080/800                | 1280/500                | 3000/1200                | 2000/800                 |
| Viewing Angle(H/V)                    | 160°/140°               | 160°/140°               | 160°/140°                | 160°/140°                |
| Overall Dimension(mm)                 | 2453 x 1502 x 38.5"     | 2453 X 1502 X 38.5"     | 3063 X 1845 X 38.5       | 3063 X 1845 X 38.5       |
| Overall Dimension(Inch)               | 96.57" x 59.13" x 1.52" | 96.57" x 59.13" x 1.52" | 120.59" x 72.64" x 1.52" | 120.59" x 72.64" x 1.52" |
| Weight(kg)                            | 115                     | 115                     | 175                      | 175                      |
| Weight(lb)                            | 253.53                  | 253.53                  | 385.8                    | 385.8                    |

| Specification                         | LM165N07                 | LM220N07                 | LM120M07                 | LM120M03                 |
|---------------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Size (inch)                           | 165"                     | 220"                     | 120"                     | 120"                     |
| Pixel Pitch(mm)                       | 1.9                      | 2.5                      | 1.3                      | 2.0                      |
| Brightness (nit)                      | 100-600                  | 100-600                  | 100-550                  | 100-550                  |
| Refresh Rate                          | 1920-3840                | 1920-3840                | 1920-3840                | 1920-3840                |
| Resolution                            | 1920 X 1080              | 1920 X 1080              | 1920 X 1080              | 1280 X 720               |
| Power Consumption(MAX/Ave)(W/display) | 2880/1150                | 5120/2000                | 2080/800                 | 1280/500                 |
| Viewing Angle(H/V)                    | 160°/140°                | 160°/140°                | 160°/140°                | 160°/140°                |
| Overall Dimension(mm)                 | 3673 X 2188 X 38.5       | 4893 X 2874 X 38.5       | 2678 X 1630 X 28.5       | 2678 X 1630 X 28.5       |
| Overall Dimension(Inch)               | 144.61" x 86.14" x 1.52" | 192.63" x 113.15" x 1.5" | 105.43" x 64.17" x 1.12" | 105.43" x 64.17" x 1.12" |
| Weight(kg)                            | 245                      | 425                      | 95                       | 95                       |
| Weight(lb)                            | 540.13                   | 936.96                   | 209.44                   | 209.44                   |


| Specification                         | LM150M07                | LM150M06                | LM180M07                 |
|---------------------------------------|-------------------------|-------------------------|--------------------------|
| Size (inch)                           | 150"                    | 150"                    | 180"                     |
| Pixel Pitch(mm)                       | 1.7                     | 2.0                     | 2.0                      |
| Brightness (nit)                      | 100-550                 | 100-550                 | 100-550                  |
| Refresh Rate                          | 1920-3840               | 1920-3840               | 1920-3840                |
| Resolution                            | 1920 X 1080             | 1600 X 900              | 1920 X 1080              |
| Power Consumption(MAX/Ave)(W/display) | 3000/1200               | 2000/800                | 2880/1150                |
| Viewing Angle(H/V)                    | 160°/140°               | 160°/140°               | 160°/140°                |
| Overall Dimension(mm)                 | 3344 X 2004 X 28.5      | 3344 X 2004 X 28.5      | 4010 X 2379 X 28.5       |
| Overall Dimension(Inch)               | 131.65" x 78.90" x 1.1" | 131.65" x 78.90" x 1.1" | 157.87" x 93.66" x 1.12" |
| Weight(kg)                            | 143                     | 143                     | 200                      |
| Weight(lb)                            | 315.26                  | 315.26                  | 440.92                   |



\*The thickness of screen



## MAXHUB Interactive Meeting Rooms with Increased Engagement

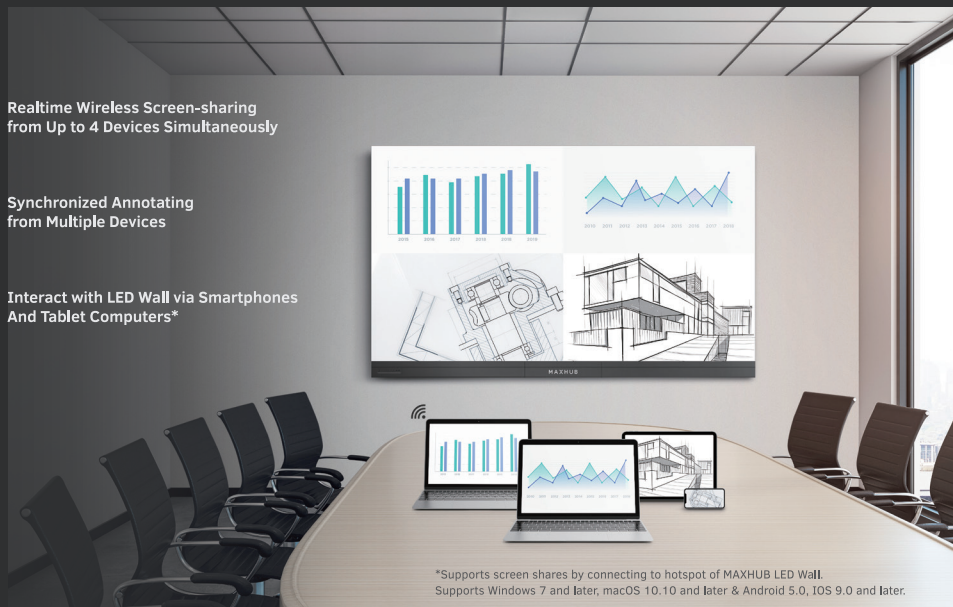

## MAXHUB Infuses Auditoriums with Immersive Meeting Experience



## Featuring All-in-one Design

- Integrated design with no external devices
- Provides a built-in Android System
- Revolutionary 3-in-1 board that integrates a power supply, a receiving card and a hub board



Down to 4.8kg/cabinet



Down to 28.5 mm



100-500 & 100-600cd/m<sup>2</sup> Adjustable



≥3000 : 1



Built-in Android

## Delivering simplicity And Efficiency



- Plug & play system, only one button to turn on/off
- Comes with a smart control to access settings



Volume



Color Temperature



Brightness



Contrast Ratio



Input Signal Switching




Aspect Ratio



Standby Mode

## Supporting Full-front Service And Easy Maintenance

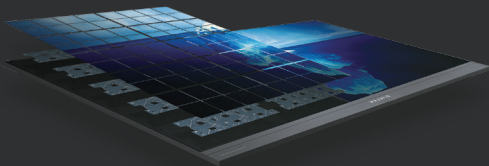

- Integrated 3-in-1 board replacement solves problems quickly
- Unified hardware & software technical support & service

## Catering to Various Indoor Scenarios



Ceiling-hanging



Mobile Stand-mounting



Wall-mounting