PS760

The High-Definition Multimedia Document Camera

The Lumens[™] PS760 is an adaptable high-definition multimedia document camera. With 20x optical zoom and 1080p / UXGA resolution that delivers clear images and crisp text every time, the Lumens[™] PS760 is ideal for lecture halls and folds to just 6"(15 cm) height for storage in a podium or cart. The Lumens[™] PS760 operates without a computer or with any interactive whiteboard software. Special features include a built-in backlight, support for USB mouse controllers, and stand-alone one-touch audio and video recording and playback. These features and its unlimited 5 year REPLACEMENT warranty, make the Lumens[™] PS760 a perfect choice for educators creating a innovative learning environment.

Key Feature

- High Definition, 1080p, UXGA, WXGA, SXGA, and XGA
- 20x optical zoom
- HDMI output
- Up to 30 frames per second live display
- Excellent Color Reproduction
- One-touch video/audio Recording and Playback
- S-video, C-Video input
- Dual VGA inputs and outputs
- Built-in Microphone
- USB drive port reads up to 32 GB thumb drives
- Compatible with all interactive whiteboards
- Time-lapse photography
- Automatic and manual Slideshow
- Full-sized backlight lightbox
- 5-year Full REPLACEMENT Warranty



Lumens

Brighter Teaching

Specifications

PS760

IMAGING

Sensor Technology : CMOS Output Resolution : XGA (1024 x 768), SXGA (1280 x 1024), WXGA (1280 x 800), UXGA (1600 x 1200), 1080p Frame Rate : Up to 30 fps Zoom Capacity : 20x optical zoom and 5x digital zoom Capture Area : 18" x 13.5" (457 x 343 mm)

LIGHTING

Lamp Type : Dual LED Lamp Gooseneck Backlight : LED Backlight 6.8"x 9.7" (210 x 297 mm)

INPUT/OUTPUT

Ethernet : Yes, for IP Address and Remote control Power Supply : External, 12VDC Adapter (100-240VAC) HDMI Output : Yes VGA In : 2 ports, active pass through from the computer to an external monitor, can switch VGA source between 2 computers VGA Out : 2 ports, to projector and to monitor for VGA pass through Audio In : 3 audio in (Built-in microphoe x I,Video x I, and VGA x I) Audio Out : 3.5mm phone jack for earphones or speakers Internal Memory Capacity : Up to 120 JPEG images External Memory Capacity : USB drive accepts up to 32 GB USB Support : High Speed 2.0 (480 Mbps) Transmission Video IN : C-Video / S-Video IN x I Video OUT : C-Video / S-Video OUT x I RS232 : I port

SOFTWARE

Podium View[™] Software Included: Support PC Windows 8, 7, XP, Vista and Mac OSX (Free download from Lumens[™] website.)

Video Recording with Audio : Record video with various compression Playback with audio out- No PC needed

Image Capture : Single or continuous capture of JPEG images

Annotation: Add annotations directly to live image

USB Driver : Support UVC, WIA and TWAIN for integration with interactive whiteboards including Promethean[™], SMART[™], Hitachi Starboard[™], Mimio[™], and others

SECURITY

Lock-Down Mode : Lock the unit with password entry

Auto Erase Mode : Option to automatically erase internal memory during power down

Anti-Theft : Kensington Lock Port on document camera chassis

Bolt Holes on Bottom for Mounting : VESA standard 2.95" x 2.95"(75 x 75 mm)

ACCESSORIES

Standard : Power Cord, Power Adapter, VGA cable, USB cable, Audio Cable, Mini-DIN adapter, Remote, Remote Holer, Microscope adapter, Lens cap Optional : Padded carrying case, USB 2.0 high speed extension cable - 15 feet (5m)

OPERATION FUNCTIONS


Auto Tune : Yes, single button to adjust for best possible images Focus : Yes, Auto / Manual Auto Exposure : Yes Auto White Balance : Yes Photo/Text Mode : Choose photo/grayscale/text mode Image Mode : Choose normal/35mm slide/microscope/negative film Image Capture : Single or continuous capturing images (time lapse photography) to built-in memory, to an USB flash drive, or to the computer via USB Audio and Video Recording : One touch, standalone audio and video recording with built-in microphone Picture in Picture (PIP) : Yes Freeze : Yes Slide Show : FastSlide[™] Technology to automatically or manually playback saved images Image Rotation : Full screen image rotation from 90,180 to 270 degree Annotation : Yes, by using Podium View[™] software or by UPS or Wireless Standard Mouse Spotlight : Yes Low Light Mode : Yes Mask : Yes Pan Across the Screen : Enlarged any part of the image and pan it by using the arrow keys Projector Type : Yes, supports both LCD and DLP projectors Volume control : Yes, via remote or OSD Matrix switcher : Yes, Can switch VGA/Video Input independently by VGA OUT(2) setting Ethernet Image Transfer : Yes, for distance learning Ethernet MIC transfer : Yes, for distance learning Sync. Real Time Clock by Ethernet : Yes Real Time Clock : Yes, record capture time on photo Kev tone : Yes Touch Panel : Yes

OTHER

Weight : 12.3 lbs (5.6 Kg) Dimensions Operating : 18.3" × 15.2" × 23.1" (466 × 385 × 588 mm)(L × W × H) Dimensions Folded : 18.3" × 15.2" × 6" (466 × 385 × 152 mm) (L × W × H) Warranty : 5-year

Compliance: Lumens[™] comply with these important standards : FCC-EMI, cUL, CE-EMC, CE-LVD, RoHS, and WEEE

I/O CONNECTIONS

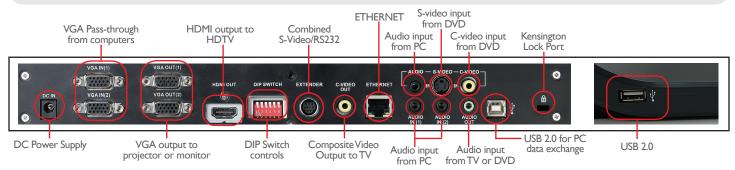



Lumens Integration, Inc. 4116 Clipper Court Fremont, CA. 94538 Phone : 888.542.3235 Fax : 510.252.1389 http://www.MyLumens.com Lumens Europe Stationstraat 5 1730 Asse, Belgium Phone : +32 (0) 2 452 76 00 Fax : +32 (0) 2 452 76 00 http://www.MyLumens.com